

SAC 25/1AEVS-5

SINGLE ARBOR STRAIGHTEN & CUT


Why Shuster®?

Since 1866 Shuster® has designed, manufactured and sold more Wire Straightening and Cutting machines than nearly all of our competitors combined. Our adherence to the principles of reliability and low operating costs have stood the test of time for over 150 years and we pride ourselves as important contributors to American Manufacturing. Our customers appreciate our dedication to **"Made in the USA,"** and know we base our success on the ability to contribute to their growth.



Now with

» **Easy Access Clam-Shell Guards.**

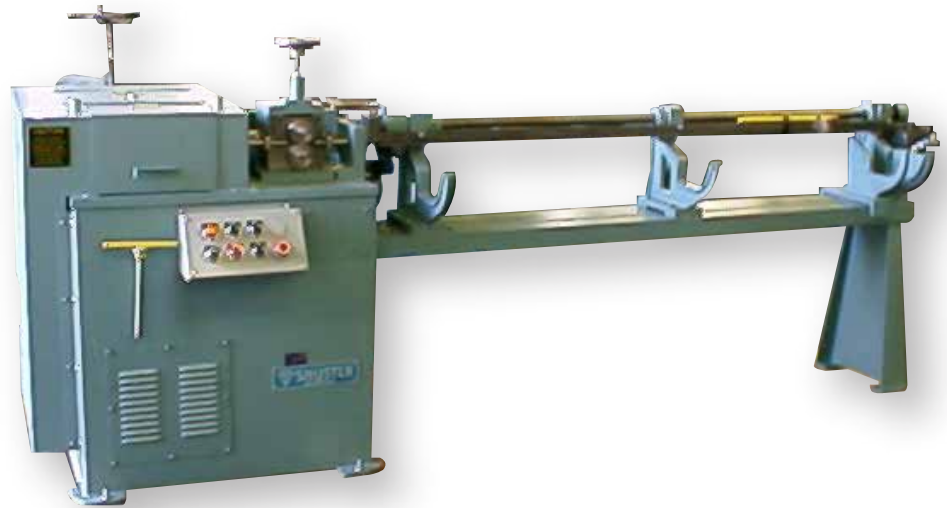

SPECIFICATIONS

Capacity	.093" - .250"	Shortest Cut	4"
Feed Speed (fpm)	20 to 265	Height to Wire Centerline	36"
Motor Horsepower	5HP Arbor/Shear 3HP Feed	Floor Space (3 ft. cut)	84" X 39"
Transmission	AC DRIVE	Dimensions	84" X 36" X 49"
Max. No. Cuts Per Minute	135	Weight	1330 lbs.

Minimum Capacity can be extended to .062" with guide bar change.

2" cut available with specially modified factory shear.

All Shuster® Single Arbor Wire Straightening and Cutting Machines feature:

Five Cavity Rotary Arbors

on perfectly centered mounts using the highest available quality bearings and direct V-Belt drives to minimize vibration and noise.

Positive Stop-Gauge Rod Release Mechanism

virtually eliminates scrap from wedging while providing operators rapid, easy adjustment and set up.

Edge sensing Proximity sensor target

is coupled with our proprietary pneumatically-controlled tripping mechanism, providing instantaneous activation of a synchronous clutch and cam cut-off system, minimizing dwell time on the shear and allowing for a precision cut within $\pm 1/64"$.

State-of-the-Art AC Inverter Drive

simple operating variable speed drive can be changed during operation.



485 Ella T Grasso Blvd., New Haven, CT 06519
Tel: 203.562.3178 | Fax: 203.598.3401 | sales@shustermettler.com